



■ Features

- Charger for lithium batteries (Li-ion, LiFePO4 and lithium manganese) and Lead-Acid batteries
- Built-in 4 stage charging curve (For Lithium batteries) and 4 stage charging curve (For Lead-Acid batteries)
- Universal AC input / Full range (90-264VAC), 1200W output Max.
- Built-in active PFC function, 94% efficiency
- Protection: Short circuit / Over voltage / Over temperature / Battery over voltage / Battery reverse polarity protection
- CAN or RS485 Communication port provided, LCD panel is optional

■ Applications


- EV, robot and AGV
- Energy storage system
- Industrial applications
- Electric motorcycle / Electric sweeper

■ Description

G1300 is a single output max. 1200W AC/DC desktop type charger with 4 and 3 stage charging curve. In addition to the embedded pre-defined charging curves, the default curve is programmable and thus able to accommodate different types of batteries, such as Lead-acid batteries (gel, flooded and AGM) and Lithium batteries (Li-ion, LiFePO4 and Lithium manganese). G1300 can be set different charging voltage value, charging current value and charging end current value through CAN bus, according to customer's own requirements. Using with optional CAN meter, it can display the setting voltage, current, running voltage, current and battery capacity.

■ Model serial P/N

G1300-XXXXYY

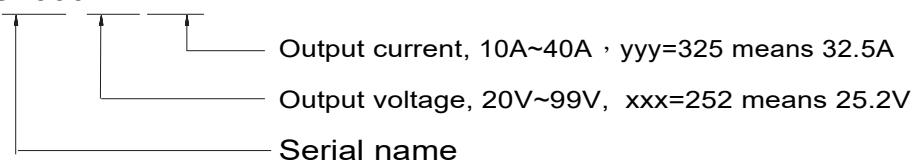

Li-ion battery charger (Only the adopted models are listed in table, for other output please reach our sales)

MODEL		G1300-29440	G1300-420280	G1300-546220	G1300-588200	G1300-840140
OUTPUT	Charge voltage	29.4V±1%	42.0V±1%	54.6V±1%	58.8V±1%	84.0V±1%
	Charge voltage range	17.5-29.4V	25.0-42.0V	32.5-54.6V	35-58.8V	50.0-84.0V
	Charge current @AC230V	40.0A±10%	28.0A±10%	22.0A±10%	20A±10%	14.0A±10%
	Pre-charge current	8A±10%	5.6A±10%	4.4A±10%	4.0A±10%	2.8A±10%
	Charge-end current	≤4A ±20%	≤2.8A ±20%	≤2.2A ±20%	≤2.0A ±20%	≤1.4A ±20%
	Max. output@AC120~240V	1200W	1200W	1200W	1200W	1200W
	Recommended battery capacity Note.3	40 - 400Ah	28 - 280Ah	22 - 220Ah	20 - 200Ah	14 - 140Ah
	Leakage current from battery (Typ.)	≤1mA				
CHARGE INDICATOR	Bi-color LED or LCD panel	Red charging, Green charged, RED-FLASHING ERRORS; LCD digital panel is an optional part.				
COMMUNICATION FUNCTION	CAN / 485 ; CAN is default	Charging parameters (voltage, current, battery type) can be set via CAN port. User can use PC terminal or our LCD display panel accessory to set these parameters.				
INPUT	Rated input voltage	100 - 240VAC 50 / 60Hz				
	Input voltage range Note.4	90 - 264VAC				
	Power factor (Typ.)	PF>0.96 @Full load				
	Input current (Typ.)	14A@100VAC				
	Inrush current (Typ.)	Cold start 75A @230VAC				
	Standby input power	< 4W				
	Efficiency (full load @ AC230V.)	93%	94%	94%	94%	94%
	PROTECTION	Short circuit Note.5	Protection type : Shut down output			
Over voltage		110% max. output				
Reverse polarity		By internal relay				
Over temperature		Shut down output, recovers automatically after temperature goes down				
ENVIRONMENT	Working temperature	-10 - +40°C (Refer to " Derating Curve")				
	Working humidity	0 - 90% RH				
	Storage temperature, humidity	-40 - +70°C, 0 - 95% RH				
	Cooling	Fan convection				
	Vibration resistance	10 – 50Hz, 2G 10min. 1cycle, 60min. each along X, Y, Z axes				
SAFETY & EMC (Note.6)	Max. temperature rise	< 40°C on casing				
	Hi-Pot Insulation	i/p to o/p: 3000V (1 min)				
	Safety standards	IEC62368				
	EMC Emission	Parameter	Standard			Test Level I Note
		Conducted	EN55032 FCCPART15			Class B
		Radiated	EN55032 FCCPART15			Class B
		Harmonic Current	EN61000-3-2			
		Voltage Flicker	EN61000-3-3			
	EMC IMMUNITY	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11				
OTHERS	MTBF	30000H				
	Dimension	280*145*48mm (L*W*H)				
	Weight	1800g				
NOTE	1. Modification for charger specification may be required for different battery specification. Please contact battery vendor or Green digital power for details. 2. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 3. This is general suggested. Please consult your battery manufacturer about maximum charging current limitation. 4. Derating is needed at AC100~120V input or above 40°C ambient. Please check the derating curve for more details. 5. This protection mechanism is specified for the case the short circuit occurs after the charger is turned on. 6. The battery charger is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EM I testing of component power supplies." 7. CAN communication protocol is defined by user, or using factory default protocol. 8. LCD display/setting panel is an optional part when place order.					


LiFePO4 battery chargers (Only the adopted models are listed in table, for other output please reach our sales)

MODEL		G1300-288400	G1300-360330	G1300-432270	G1300-576200	G1300-720166
OUTPUT	Charge voltage	28.8V±1%	36.0V±1%	43.2V±1%	57.6V±1%	72.0V±1%
	Charge voltage range	20.0-28.8V	25.0-36.0V	30.0-43.2V	40.0-57.6V	50.0-72.0V
	Charge current @AC230V	40.0A±10%	33.0A±10%	27A±10%	20.0A±10%	16.6A±10%
	Pre-charge current	8A±10%	6.6A±10%	5.4A±10%	4.0A±10%	3.32A±10%
	Charge-end current	≤4A ±20%	≤3.3A ±20%	≤2.7A ±20%	≤2.0A ±20%	≤1.66A ±20%
	Max. output@AC120~240V	1200W	1200W	1200W	1200W	1200W
	Recommended battery capacity Note.3	40 - 400Ah	33 - 330Ah	27 - 270Ah	20 - 200Ah	16 - 160Ah
	Leakage current from battery (Typ.)	≤1Ma				
CHARGE INDICATOR	Bi-color LED or LCD panel	Red charging, Green charged, RED-FLASHING ERRORS; LCD digital panel is an optional part				
COMMUNICATION FUNCTION	CAN / 485 ; CAN is default	Charging parameters (voltage, current, battery type) can be set via CAN port. User can use PC terminal or our LCD display panel accessory to set these parameters.				
INPUT	Rated input voltage	100 - 240VAC 50 / 60Hz				
	Input voltage range Note.4	90 - 264VAC				
	Power factor (Typ.)	PF>0.96 @full load				
	Input current (Typ.)	14A@100VAC				
	Inrush current (Typ.)	Cold start 75A @230VAC				
	Standby input power	< 4W				
	Efficiency (Typ.)	93%	94%	94%	94%	94%
PROTECTION	Short circuit Note.5	Protection type : Shut down output				
	Over voltage	>3.7V*N				
	Reverse polarity	By internal relay				
	Over temperature	Shut down output, recovers automatically after temperature goes down				
ENVIRONMENT	Working temperature	-10 - +40°C (Refer to "Derating Curve")				
	Working humidity	0 - 90% RH				
	Storage temperature, humidity	-40 - +70°C, 0 - 95% RH				
	Cooling	Fan convection				
	Vibration resistance	10 – 50Hz, 2G 10min. 1cycle, 60min. each along X, Y, Z axes				
SAFETY& EMC (Note.6)	Max. temperature rise	< 40°C on casing				
	Hi-Pot Insulation	i/p to o/p: 3000V (1 min)				
	Safety standards	IEC62368				
	EMC Emission	Parameter	Standard			Test Level I Note
		Conducted	EN55032 FCCPART15			Class B
		Radiated	EN55032 FCCPART15			Class B
		Harmonic Current	EN61000-3-2			
		Voltage Flicker	EN61000-3-3			
	EMC IMMUNITY	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11				
OTHERS	MTBF	30000H				
	Dimension	280*145*48mm (L*W*H)				
	Weight	1800g				
NOTE	1.Modification for charger specification may be required for different battery specification. Please contact battery vendor or Green digital power for details. 2.All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 3.This is general suggested. Please consult your battery manufacturer about maximum charging current limitation. 4.Derating is needed at AC100~120V input or above 40°C ambient. Please check the derating curves. 5.This protection mechanism is specified for the case the short circuit occurs after the charger is turned on. 6.The battery charger is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EM I testing of component power supplies." 7. CAN communication protocol is defined by user, or using factory default protocol. 8. LCD display/setting panel is an optional part when place order.					


Lead-Acid battery charger (Only the adopted models are listed in table, for other output please reach our sales)

MODEL		G1300-296400	G1300-444270	G1300-592200	G1300-740160	G1300-888130
OUTPUT	Charge voltage (High voltage)	29.6V±1%	44.4V±1%	59.2V±1%	74.0V±1%	88.8V±1%
	Charge voltage range	20.0-29.6V	30.0-44.4V	40.0-59.2V	50.0-74.0V	60.0-88.8V
	Float charge (Low voltage)	27.6V±1%	41.4V±1%	55.2V±1%	69.0V±1%	82.8V±1%
	Charge current @AC230V	40.0A±10%	27.0A±10%	20.0A±10%	16.0A±10%	13.0A±10%
	Charge-end current	≤8.0A ±20%	≤5.4A ±20%	≤4.0A ±20%	≤3.2A ±20%	≤2.6A ±20%
	Max. output@AC120~240V	1200W	1200W	1200W	1200W	1200W
	Recommended battery capacity Note.3	160 - 400Ah	100 - 300Ah	80 - 200Ah	60 - 160Ah	50 - 130Ah
	Leakage current from battery (Typ.)	≤1mA				
CHARGE INDICATOR	Bi-color LED or LCD panel	Red charging, Green charged, RED-FLASHING ERRORS; LCD digital panel is an optional part				
COMMUNICATION FUNCTION	CAN / 485 ; CAN is default	Charging parameters (voltage, current, battery type) can be set via CAN port. User can use PC terminal or our LCD display panel accessory to set these parameters.				
INPUT	Rated input voltage	100 - 240VAC 50 / 60Hz				
	Input voltage range Note.4	90 - 264VAC				
	Power factor (Typ.)	PF>0.96 @full load				
	Input current (Typ.)	14A@100VAC				
	Inrush current (Typ.)	Cold start 75A @230VAC				
	Standby input power	< 6W				
	Efficiency (Typ.)	93%	94%	94%	94%	94%
PROTECTION	Short circuit Note.5	Protection type : Shut down output				
	Over voltage	>15.5V*N				
	Reverse polarity	By internal relay				
	Over temperature	Shut down output, recovers automatically after temperature goes down				
ENVIRONMENT	Working temperature	-10 - +40°C (Refer to " Derating Curve")				
	Working humidity	0 - 90% RH				
	Storage temperature, humidity	-40 - +70°C, 0 - 95% RH				
	Cooling	Fan convection				
	Vibration resistance	10 - 50Hz, 2G 10min. 1cycle, 60min. each along X, Y, Z axes				
SAFETY& EMC(Note.6)	Max. temperature rise	< 40°C on casing				
	Hi-Pot Insulation	i/p to o/p: 3000V (1 min)				
	Safety standards	IEC62368				
	EMC Emission	Parameter	Standard			Test Level I Note
		Conducted	EN55032 FCCPART15			Class B
		Radiated	EN55032 FCCPART15			Class B
		Harmonic Current	EN61000-3-2			
		Voltage Flicker	EN61000-3-3			
EMC IMMUNITY	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11					
OTHERS	MTBF	30000H				
	Dimension	280*145*48mm (L*W*H)				
	Weight	1800g				
NOTE	1. Modification for charger specification may be required for different battery specification. Please contact battery vendor or Green digital power for details. 2. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 3. This is general suggested. Please consult your battery manufacturer about maximum charging current limitation. 4. Derating is needed at AV100~120V input or above 40°C ambient. Please check the derating curves 5. This protection mechanism is specified for the case the short circuit occurs after the charger is turned on. 6. The battery charger is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EM I testing of component power supplies." 7. CAN communication protocol is defined by user, or using factory default protocol. 8. LCD display/setting panel is an optional part when place order.					


■ Block Diagram

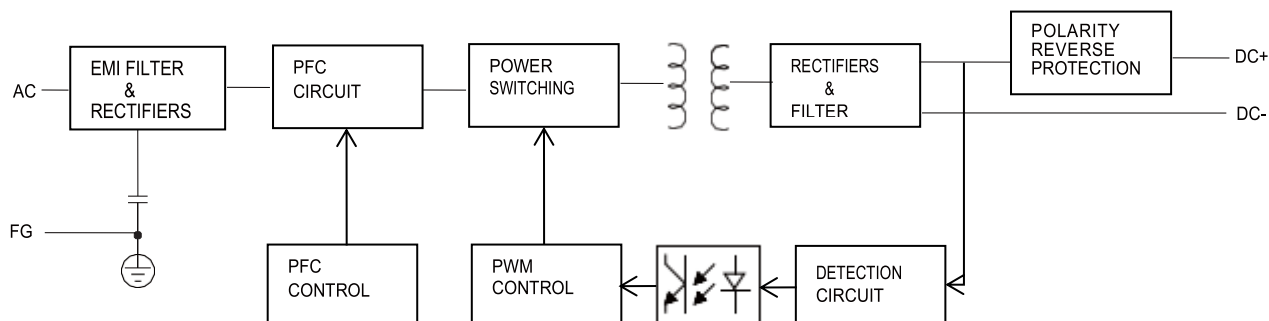

■ Derating Curve for ambient

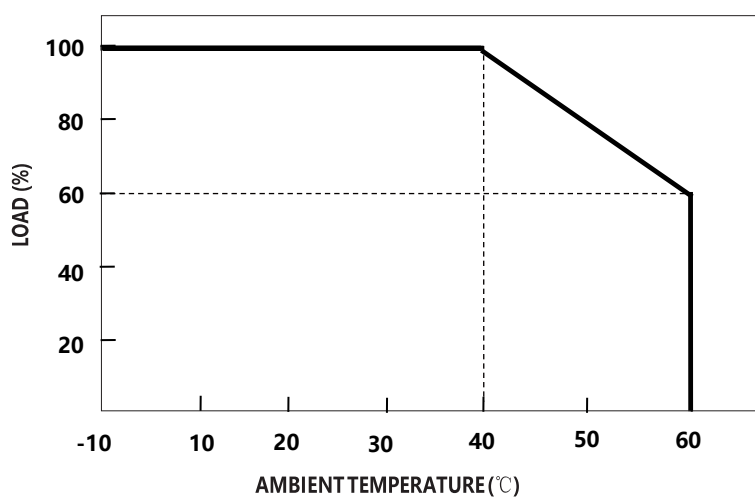


■ Derating curve for AC input voltage

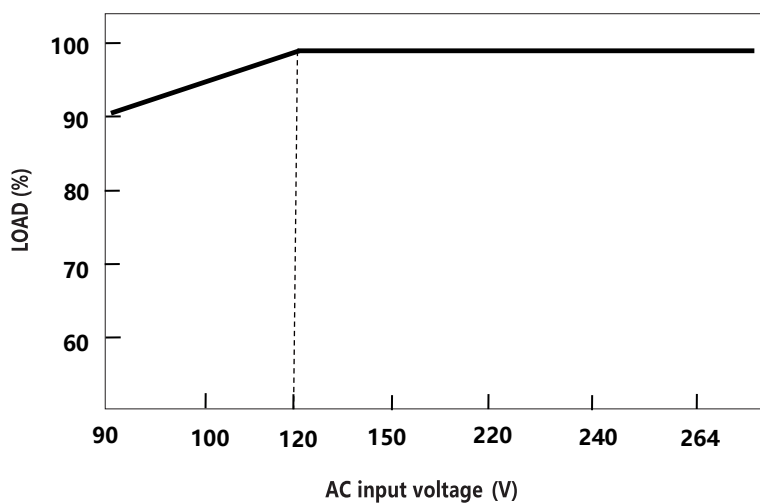




■ Charging Curve

© 4 stage charging curve(Li-ion battery charger)

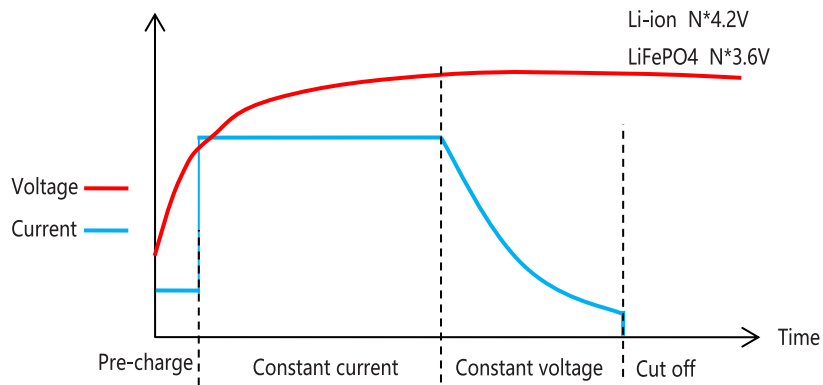

© 3 stage charging curve(Lead-Acid battery charger)

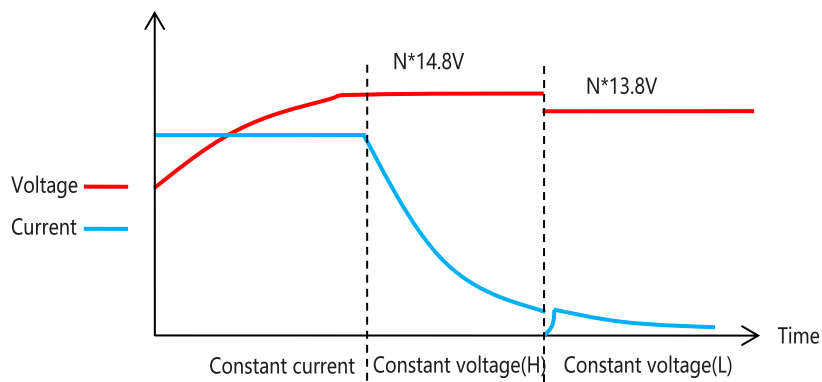

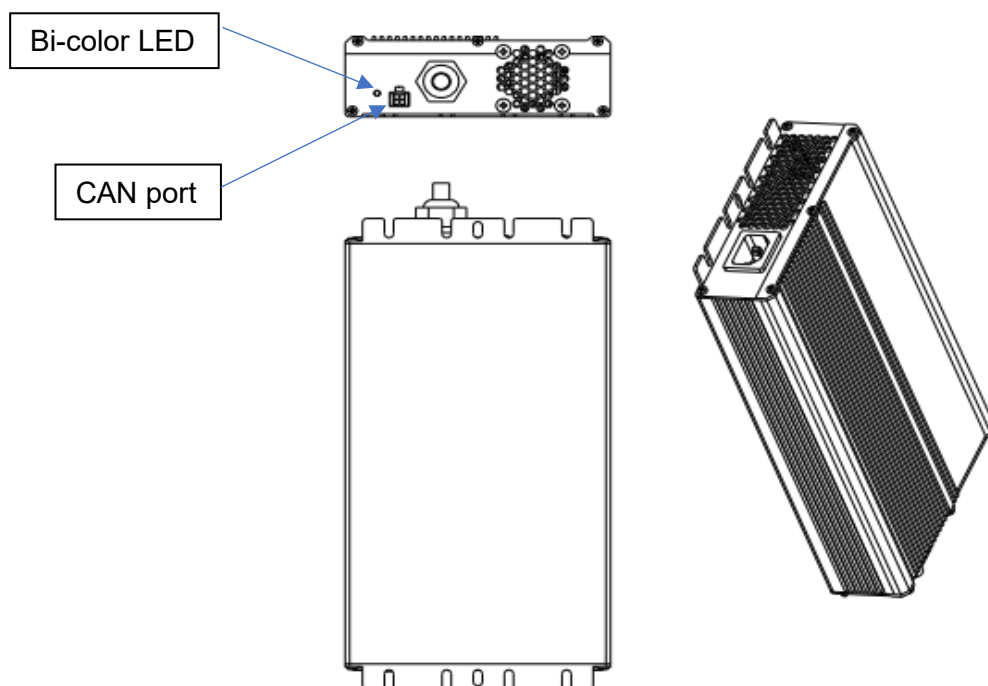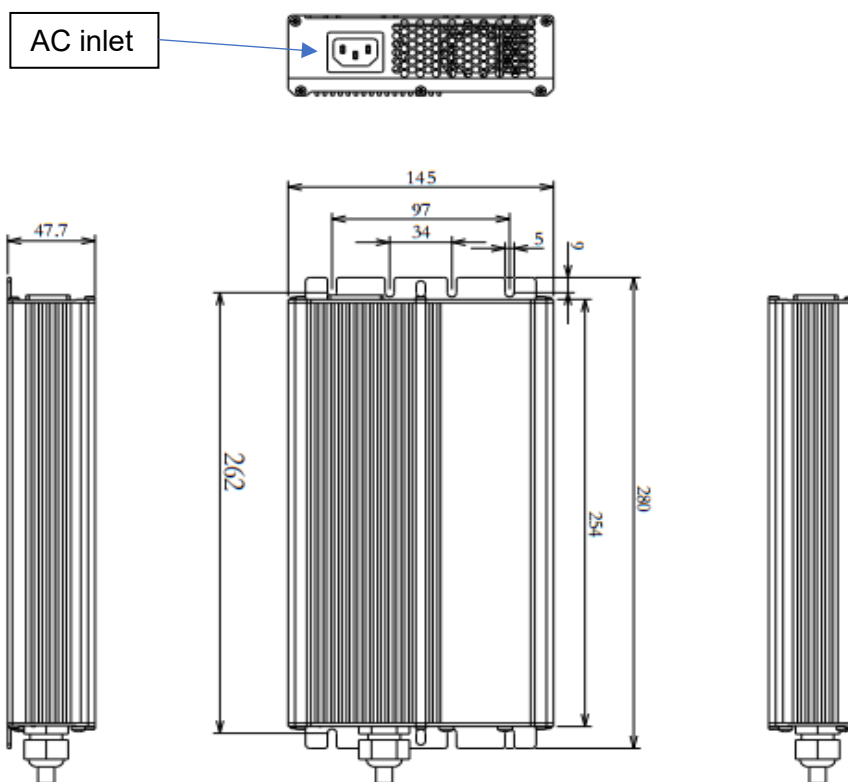

■ Product & CAN meter profile

